

DG6001+ Dissolved H2 Module for Isolating Oil

Operation Manual



ProSense Technologies Co., Ltd.



Brief Introduction

DG6001+ dissolved H2 module, works as the core part of dissolved gas analyzer of Photoacoustic spectroscopy, based on fuel cell technology, relied on numerous patented technologies, combined with years of field experience, is specialized in the detection and monitoring of hydrogen dissolved in the transformer oil and ensures the safe operation of transformer, shunt reactor, bushing, etc...



Key Features


- > Industrial gas sensor with multiple patents applied
- > Gas separation and detection integrated
- Vacuum withstand
- > Can be applied in oil phase directly
- > Free from poisoning, electrolyte leakage
- Precise control of internal environment, free from environmental influence
- Purpose-designed for hydrogen detection in harsh environment
- Non- wearable and consumable, maintenance free
- ➤ High stability, fast response, wide detection range
- Long service life of over 10 years

Typical Applications

- > Energy
- Electric Power
- > Petrochemical
- Mining
- Others
- **>**



Diagram

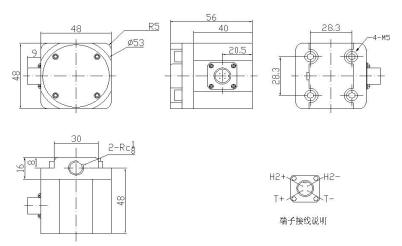

Note: All dimensions in mm; All tolerances ± 0.15 mm unless otherwise stated

Technical Specification

| Items | Technical Specification |
|----------------------------------|---|
| Principle | Micro Fuel Cell |
| Model | DG6001B |
| Detection Gas | H2 |
| Volume of Oil Chamber(ml) | 1 |
| Detection Range (μL/L) | 0~5000 (dissolved in oil) |
| Overload (µL/L) | 10000 (dissolved in oil) |
| Resolution (μL/L) | 1 |
| Accuracy | $\pm 10\%$ or ± 20 ppm whichever is greater |
| Response Time (T80) | <10min |
| Long-term Sensitivity Drift | 2% /year |
| Output Signal | linear |
| Repeatability | 1% of signal |
| Operating Temperature Range (°C) | -40 ~ 80 |
| Storage Temperature Range (°C) | -20 ~ 60 |
| Operating Humidity Range | $5 \sim 95\%$ (non-condense) |
| Pressure at the probe | Absolute vacuum to 700kPa |
| Service Life | >10years |
| Storage Life | 5years |



Add: Building4, Lianjian S&T Park, LonghuaDistrict, Shenzhen, China;

Tel: +86 755 3669 0079 Website: http://www.szprosense.com

Email: sales@szprosense.com