

WZ-H3-NK Selective & High Temperature Resistant Formaldehyde Module



ProSense Technologies Co., Ltd.

Brief Introduction

WZ-H3-NK selective & high temperature resistant formaldehyde module is the one launched specially for application in cases where temperature is higher than 60 °C. WZ-H3-NK HCHO module is the first application of solid electrolyte integrated in fuel cell vehicles to HCHO detection ----real solid electrolyte, free from electrolyte leakage or dry out; WZ-H3-NK selective HCHO module is free from the influence of the interference gases at low concentration, such as C₂H₅OH and can generate accurate detection result. WZ-H3-NK selective HCHO module is pre-calibrated in the factory and can be integrated into your system directly.


Typical Applications

- HCHO detection in vehicle
- Air conditioners
- Smart home
- Portable devices
- Wearable devices
- Air purifier
-

Key Features


- Selective detection
- High temperature resistance
- High precision
- Fast response
- Long service life
- Low power consumption
- High stability

Diagram

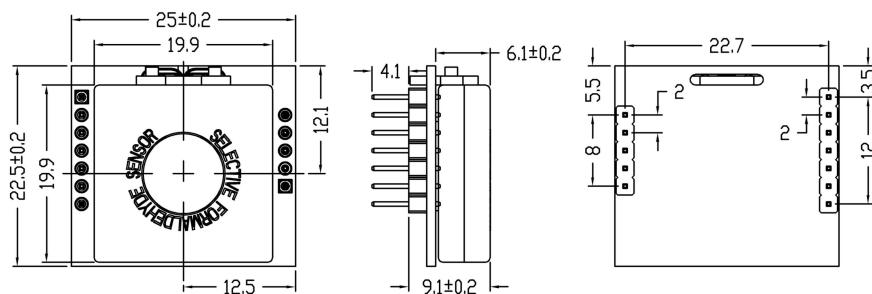

Definition of Pins

PIN	DEFINITION
Pin1	Vin(3.3 - 5V)
Pin2	GND
Pin6	TXD



Pin7	RXD
------	-----

Technical Specification

MODEL	WZ-H3-NK
Detection Principle	Micro fuel cell
Detectable Gas	HCHO
Detection Range	0-1ppm
Overload	5ppm
Input Voltage	3.3-5V
Response Time (T90)	<90S
Resolution	0.01ppm
Accuracy	±30ppb or ±10%, whichever is greater
Operating temperature range	-40°C~70°C
Operating Humidity Range	10%—90%RH (non-condense)
Lifetime	6years in air
Warranty Period	12 months
Weight	4g

Cross Sensitivity

Interference Gas	Concentration of Interference Gas(ppm)	Concentration of HCHO(ppm)
Alcohol	2	<0.04
C6H6	10	0
CH3COOH	10	0
NH3	10	0
CO	1000	6
H2	1000	6

Communication Protocol

➤ General Settings

Module makes use of serial communication.

Communication configuration parameters are:

Baud rate	9600
Data bits	8 bits
Stop bit	1 bit
Parity bit	None

➤ Communication Command

There are two communication types: active upload type and Q&A type. The default type is active upload and it sends gas concentration once every second. Commands are as follow:

0	1	2	3	4	5	6	7	8
Start	Gas	Unit ppb	No decimal byte	Concentrati on (High byte)	Concentration (low byte)	Full range (high byte)	Full range (low byte)	Check sum
0xFF	CH2O=0x17	Ppb=0x04	0x00	0x00	0x25	0xXX	0xXX	0x25

Gas concentration = concentration (high byte)*256 + concentration (low byte)

Switch to Q&A mode:

0	1	2	3	4	5	6	7	8
Start	Reserved	Switch command	Q&A	Reserved	Reserved	Reserved	Reserved	Checksum
0xFF	0x01	0x78	0x41	0x00	0x00	0x00	0x00	0x46

Switch to active upload mode:

0	1	2	3	4	5	6	7	8
Start	Reserved	Switch command	Active upload	Reserved	Reserved	Reserved	Reserved	Checksum
0xFF	0x01	0x78	0x40	0x00	0x00	0x00	0x00	0x47

To read gas concentration:

0	1	2	3	4	5	6	7	8
Start	Reserved	Command	Reserved	Reserved	Reserved	Reserved	Reserved	Checksum
0xFF	0x01	0x86	0x00	0x00	0x00	0x00	0x00	0x79

To return:

0	1	2	3	4	5	6	7	8
Start	Command	Concentration (High byte)	Concentration (low byte)	Reserved	Reserved	Concentration (High byte)	Concentration (low byte)	Checksum

		(ug/m3)	(ug/m3)			(ppb)	(ppb)	
0xFF	0x86	0x00	0xA2	0x00	0x00	0x00	0x20	0x30

Gas concentration = concentration (high byte)*256 + concentration (low byte)

Checksum calibration

```
*****
```

*Function name: unsigned char FucCheckSum(uchar *i, uchar ln)

*Function description: checksum calibration[Take Not(Byte1+Byte2+...Byte7) +1]

*Note: Take Not(Byte1+Byte2+...ByteX (X>2)

```
*****/
```

unsigned char FucCheckSum(unsigned char *i, unsigned char ln)

{

 unsigned char j, tempq=0;

 i+=1;

 for(j=0; j<(ln-2); j++)

 {

 tempq+=*i;

 i++;

 }

 tempq=(~tempq)+1;

 return(tempq);

}

Notes

- Avoid changing or moving sensor on the module.
- Avoid moving or changing electronic elements on PCB.
- Avoid exposure to organic vapour, organic solvent、high gas concentration.
- Protect from excessive vibration and shock.

No recommended for industrial safety/personal monitoring, refer to 2-FP5.



| 普 | 感 | ProSense Technologies Co., Ltd.

Add: Building4, Lianjian S&T Park, Longhua District, Shenzhen, China;

Tel: +86 755 3669 0079

Website: <http://www.szprosense.com>

Email: sales@szprosense.com