

FC7-H2-20000 Electrochemical H2 Sensor



**Key Features & Benefits**

- \*0 Power Consumption
- \*High Precision
- \* High sensitivity
- \*Wide Linear Range
- \*Excellent Repeatability and Stability

**Applications**

Energy, Electric Power, Petrochemical, Environmental Protection, Mining, Agriculture, Smart Home, etc.

**Technical Specification**

**MEASUREMENT**

<b>Principle</b>	Micro fuel cell
<b>Range</b>	0-20000ppm
<b>Maximum Overload</b>	40000ppm
<b>Sensitivity</b>	0.3±0.1 (nA/ppm)
<b>Response Time (T90)</b>	<60seconds
<b>Baseline Offset (20°C)</b>	±50ppm
<b>Zero Drift (-20°C-40°C)</b>	±100ppm
<b>Repeatability</b>	2% of signal
<b>Output Signal</b>	Linear
<b>Long Term Output Drift</b>	<3% signal/year

**ENVIRONMENTAL**

<b>Working Temperature Range</b>	-40°C~70°C
<b>Working Pressure Range</b>	90 ~ 110 kPa
<b>Working Humidity Range</b>	10%—90% (not condensing)



**LIFETIME**

<b>Expected Operating Life</b>	5 years in air
<b>Warranty</b>	24 months

**PHYSICAL CHARACTERISTICS**

<b>Weight</b>	12g
<b>Orientation Sensitivity</b>	None

**Product Dimension**

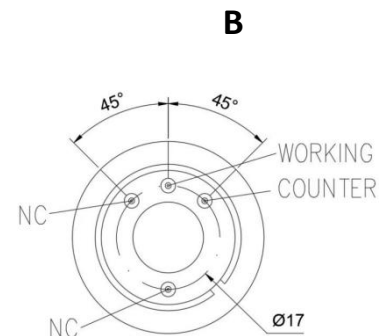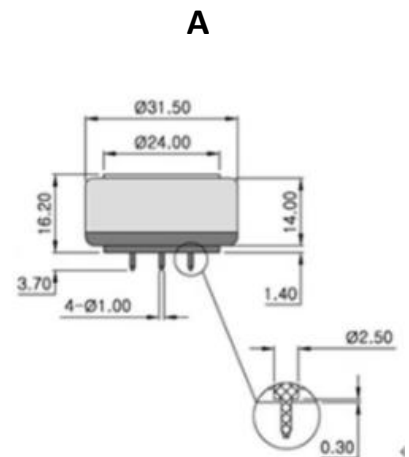

Notes: 1 All dimensions in mm  
2 All tolerances ±0.15mm unless otherwise stated.


## FC7-H2-20000 Electrochemical H2 Sensor

### Cross-Sensitivity Data

- Notes:**
1. All performance data is based on condition at 20°C, 50%RH & 1013mbar. For sensor performance data under other conditions, please contact us.
  2. Connection should be made via PCB sockets only. Soldering to the pins will seriously damage the sensor

Gas	Concentration Used (ppm)	FC7-H2-20000 (ppm H <sub>2</sub> )
CO	100	40

### Recommend Circuit

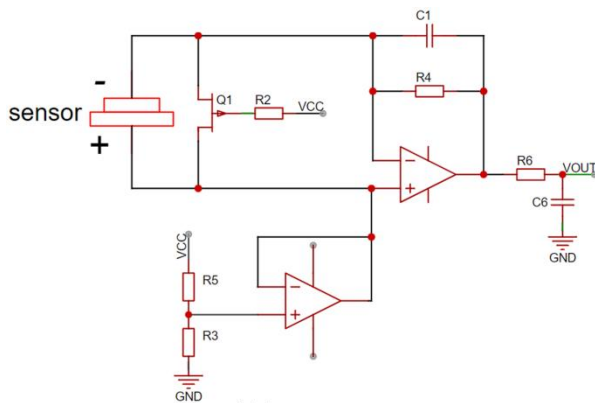

Note:††

1. ReH2mmendation for VCC is 3.3V††

2. R3&R5 help settle Vref, typical values:††

Vref=0.148mV, R3=47K/0.1%,R5=1M/0.1%††

3. R2 is reH2mmended as 1M/1%††

4. R4 is reH2mmended as 1M/1%††

5. C1 is reH2mmended as 10uf with TP5552 as the amplifier ††

6. Typical values for R6 and C6 are 1K/1% and 100nf/10% separately. ††

### Precautions:

- 1 .The sensor should be prevented from organic solvents or corrosive gases
- 2 .The sensor should not be stored in dusty, dirty areas and anaerobic environment
- 3 .The sensor must not be exposed to very high concentration of the analyte permanently
- 4 .Excessive shock or vibration should be prevented to avoid internal damage
- 5 .The pins should not be broken or bent